

## FERRET MK 2/3 (AUST)




### NOTES ON CONSTRUCTION


1. Clean up all parts prior to commencement of construction.
2. Wash all parts in warm water and detergent.
3. Check parts against those in construction diagrams.
4. Test fit parts to ensure smooth construction.
5. It is advisable to use 5 minute Epoxy or Cyano-Acetate gel (Super Glue) as the adhesive.



STEP 1

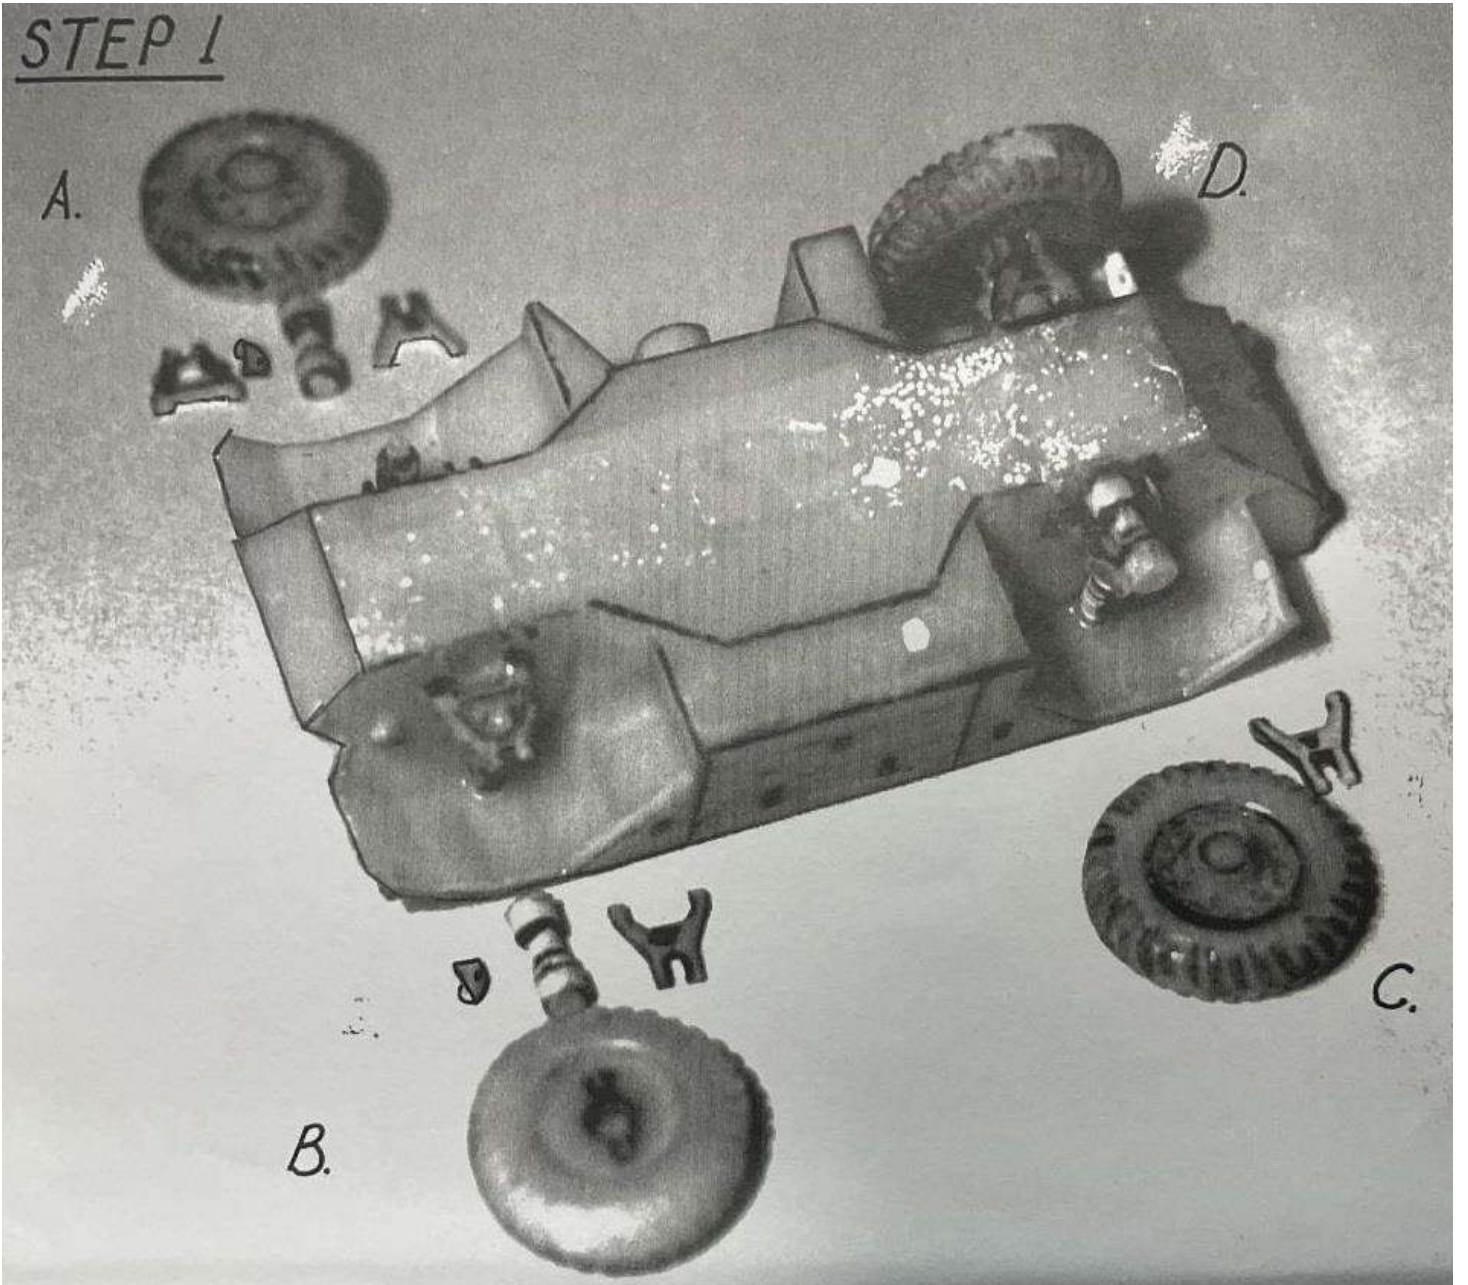


STEP 2.

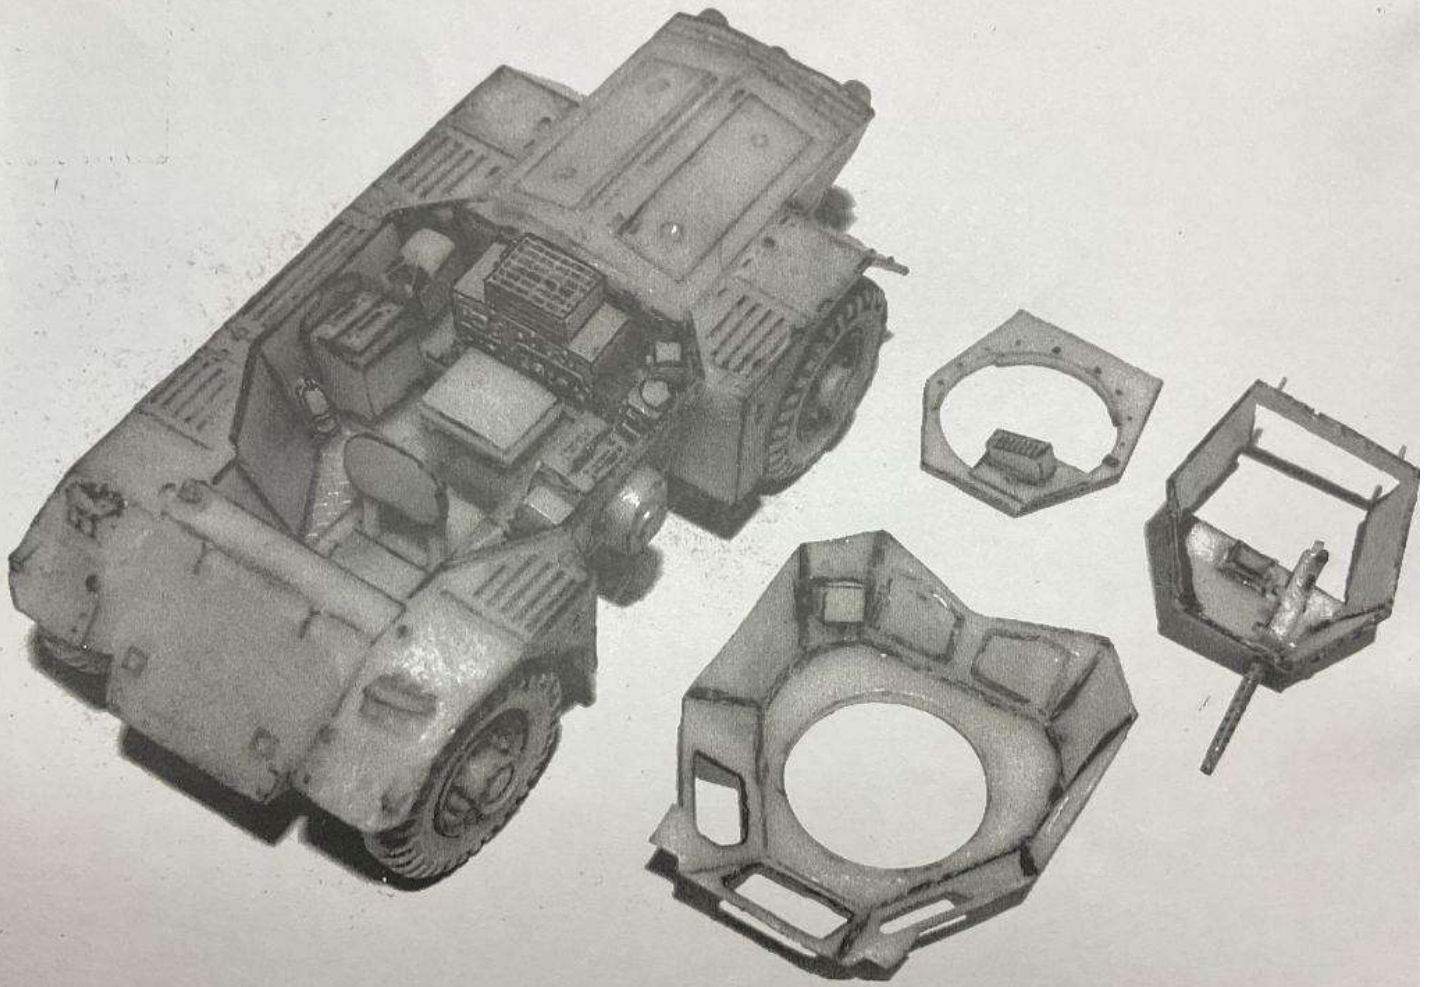




STEP 3

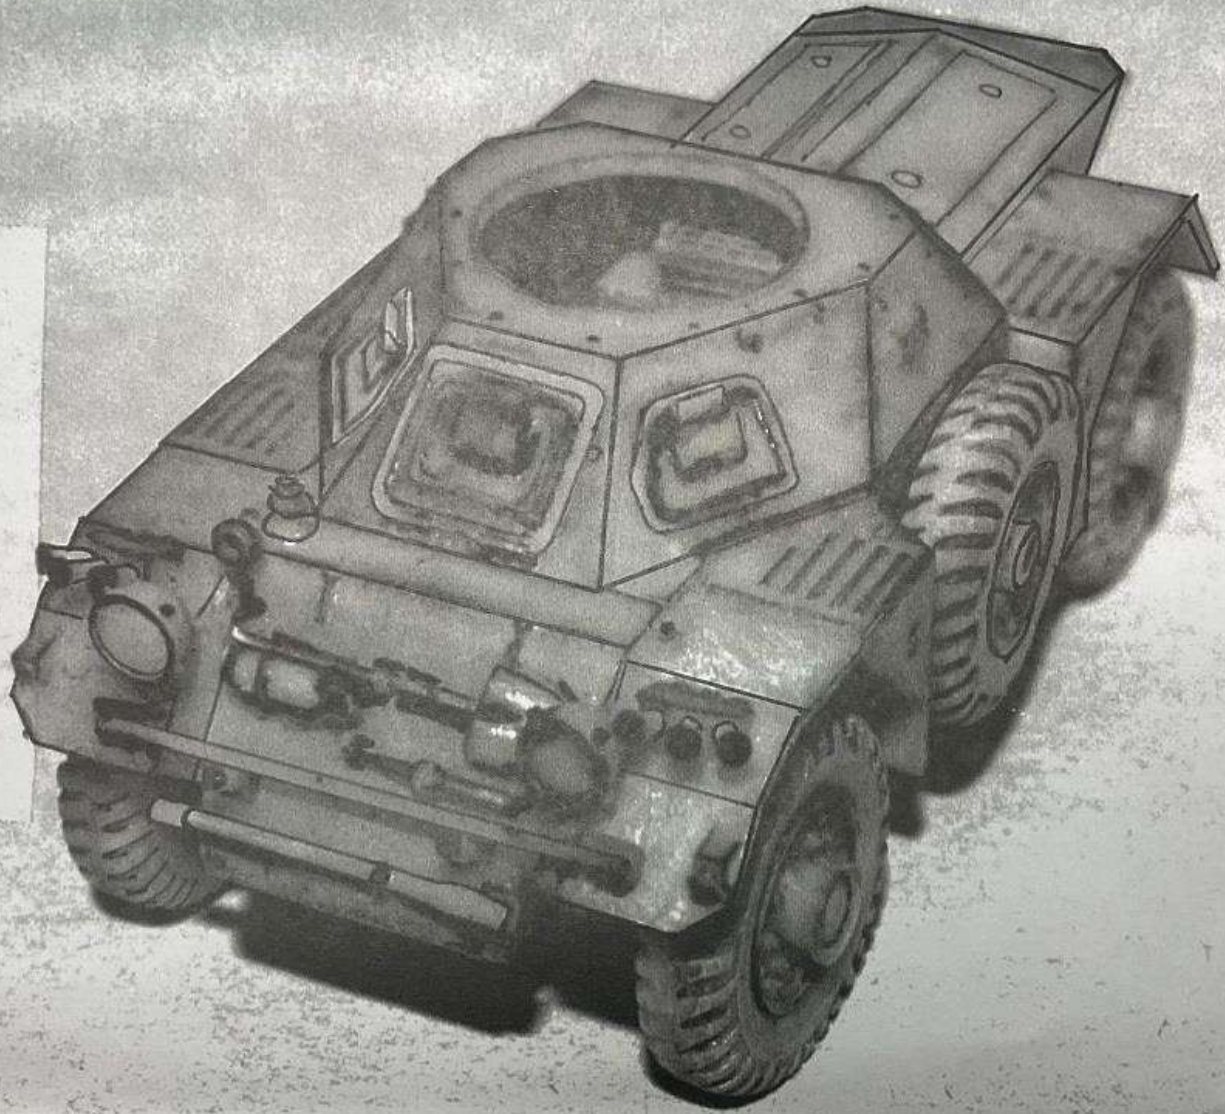

STEP 4.

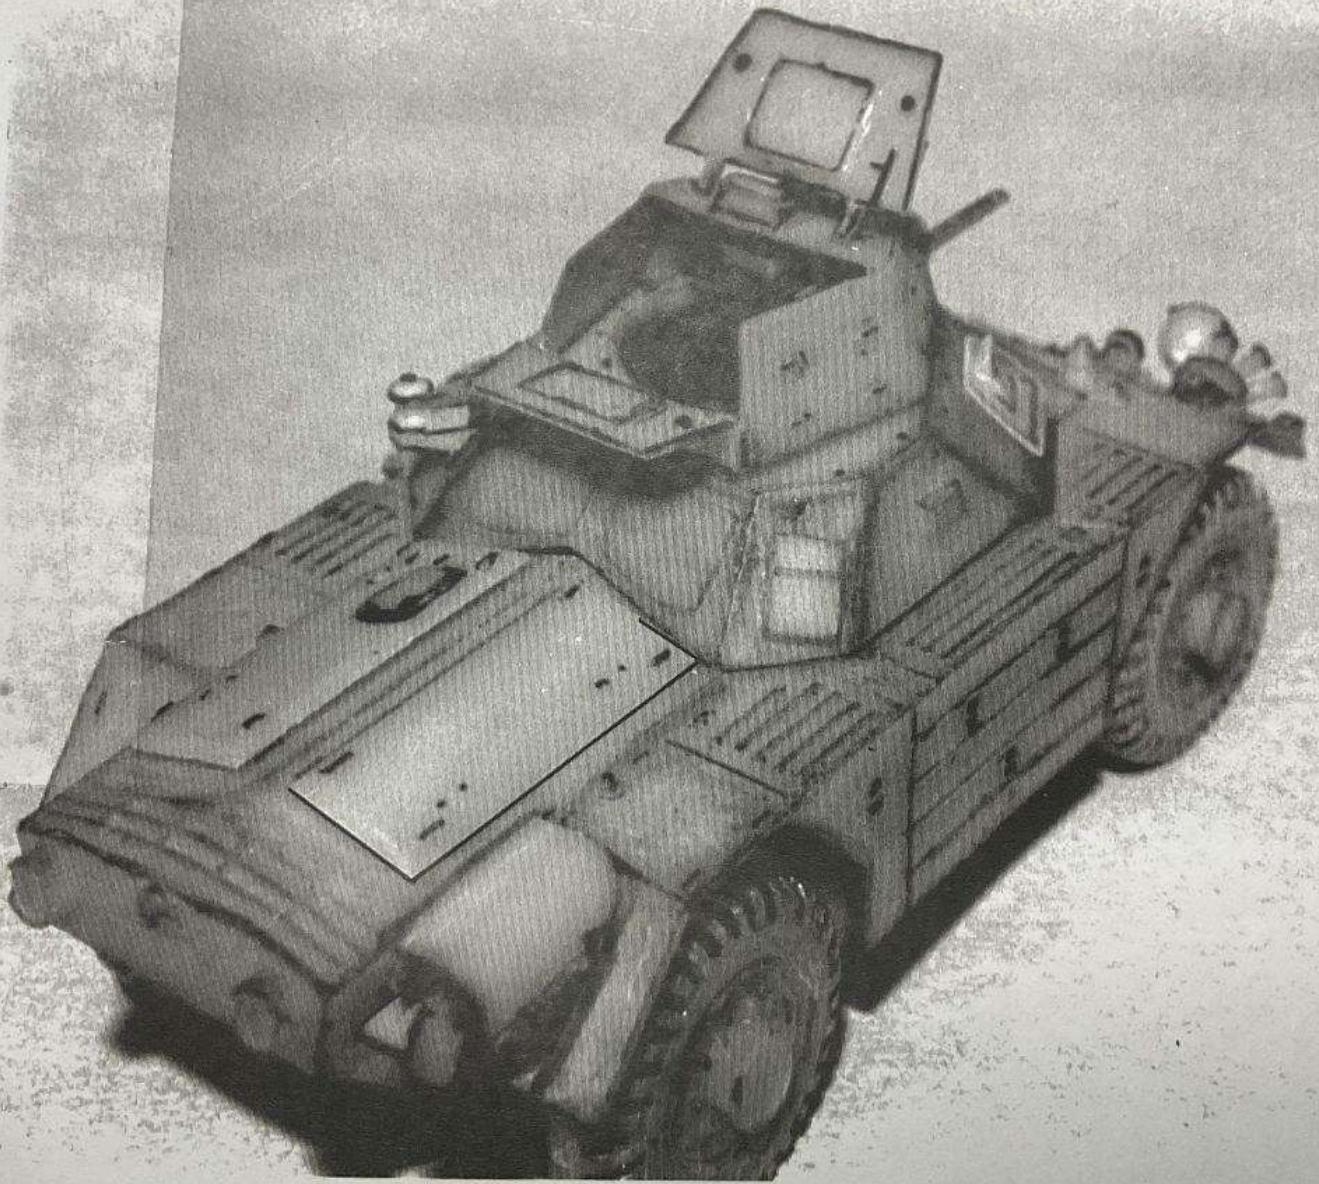



PAINTING

Exterior.....

Deep Bronze Green  
Matt Black

Silver  
Gloss Orange  
Gloss Red  
Gloss Dark Blue

Interior.....

Silver  
Matt Black

Matt Dark Green

Overall exterior of vehicle, inside of hatches.  
Tyres, heads of pioneer tools, pads on turret hatches.

Headlights, front indicators.  
Outer face of tail lights.  
Inner face of tail lights.  
Periscope lenses.

Overall interior of vehicle and turret.  
Front face of interior, seat covers, cushion of driver's seat back, components in rear lefthand corner, .30 Cal M.G.  
Radios, ammunition boxes, fire extinguisher.

